





Side Height

Tel Kablo Kanalı - TOK Serisi

Tel Kablo Kanalı - TOK Serisi

Side Height

H: 35 - T:4,5mm Wire Mesh Cable Tray Load Graph

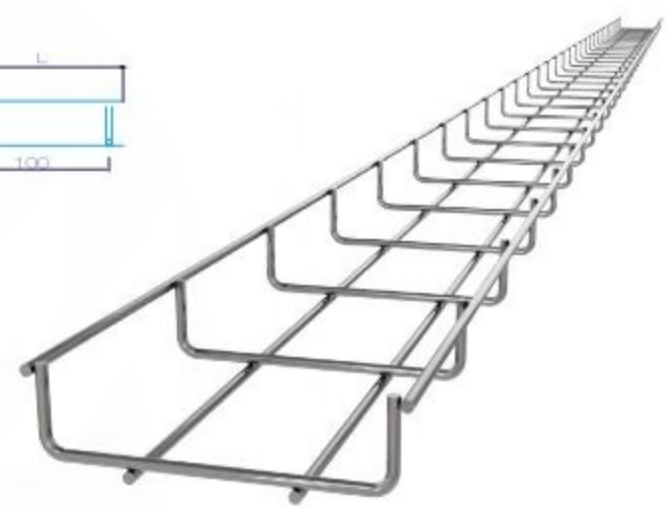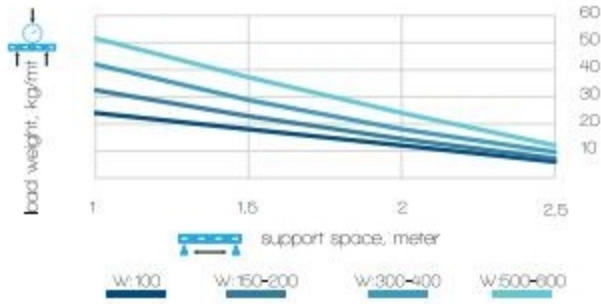

Material & Finish Options:


- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- EP : epoxy painted - RAL



Model Number	Width (W) (mm)	Wire Diameter (D) (mm)	Weight kg/m	Minimum Package	Order Code (EG)	Order Code (HDG)	Order Code (SS)
TOK 310 45	100	4,50	0,828	24 m	1800 35 100 45 7	1800 35 100 45 2	1800 35 100 45 4
TOK 315 45	150	4,50	0,798	24 m	1800 35 150 45 7	1800 35 150 45 2	1800 35 150 45 4
TOK 320 45	200	4,50	0,970	12 m	1800 35 200 45 7	1800 35 200 45 2	1800 35 200 45 4
TOK 325 45	250	4,50	1,141	12 m	1800 35 250 45 7	1800 35 250 45 2	1800 35 250 45 4
TOK 330 45	300	4,50	1,312	12 m	1800 35 300 45 7	1800 35 300 45 2	1800 35 300 45 4
TOK 340 45	400	4,50	1,654	6 m	1800 35 400 45 7	1800 35 400 45 2	1800 35 400 45 4
TOK 350 45	500	4,50	1,997	6 m	1800 35 500 45 7	1800 35 500 45 2	1800 35 500 45 4
TOK 360 45	600	4,50	2,339	6 m	1800 35 600 45 7	1800 35 600 45 2	1800 35 600 45 4

Model Number	Width (W) (mm)	Wire Diameter (D) (mm)	Weight kg/m	Minimum Package	Order Code (EG)	Order Code (HDG)	Order Code (SS)
TOK 310 40	100	4,00	0,523	24 m	1800 35 100 40 7	1800 35 100 40 2	1800 35 100 40 4
TOK 315 40	150	4,00	0,665	24 m	1800 35 150 40 7	1800 35 150 40 2	1800 35 150 40 4
TOK 320 40	200	4,00	0,808	12 m	1800 35 200 40 7	1800 35 200 40 2	1800 35 200 40 4
TOK 325 40	250	4,00	0,951	12 m	1800 35 250 40 7	1800 35 250 40 2	1800 35 250 40 4
TOK 330 40	300	4,00	1,093	12 m	1800 35 300 40 7	1800 35 300 40 2	1800 35 300 40 4
TOK 340 40	400	4,00	1,378	6 m	1800 35 400 40 7	1800 35 400 40 2	1800 35 400 40 4
TOK 350 40	500	4,00	1,664	6 m	1800 35 500 40 7	1800 35 500 40 2	1800 35 500 40 4
TOK 360 40	600	4,00	1,949	6 m	1800 35 600 40 7	1800 35 600 40 2	1800 35 600 40 4

H: 35 - T:5mm Wire Mesh Cable Tray Load Graph

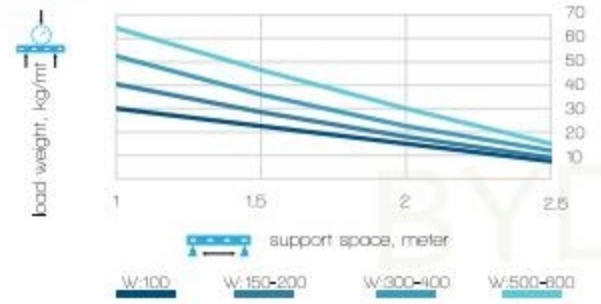


Material & Finish Options:

- HDG : hot dip galvanised EN ISO 1461
- SS : stainless steel AISI 304
- EP : epoxy painted - RAL



Model Number	Width (W) (mm)	Wire Diameter (D) (mm)	Weight kg/m	Minimum Package	Order Code (EG)	Order Code (HDG)	Order Code (SS)
TOK 310 50	100	5,00	0,941	24 m	1800 35 100 50 7	1800 35 100 50 2	1800 35 100 50 4
TOK 315 50	150	5,00	1,197	24 m	1800 35 150 50 7	1800 35 150 50 2	1800 35 150 50 4
TOK 320 50	200	5,00	1,454	12 m	1800 35 200 50 7	1800 35 200 50 2	1800 35 200 50 4
TOK 325 50	250	5,00	1,712	12 m	1800 35 250 50 7	1800 35 250 50 2	1800 35 250 50 4
TOK 330 50	300	5,00	1,967	12 m	1800 35 300 50 7	1800 35 300 50 2	1800 35 300 50 4
TOK 340 50	400	5,00	2,480	6 m	1800 35 400 50 7	1800 35 400 50 2	1800 35 400 50 4
TOK 350 50	500	5,00	2,995	6 m	1800 35 500 50 7	1800 35 500 50 2	1800 35 500 50 4
TOK 360 50	600	5,00	3,508	6 m	1800 35 600 50 7	1800 35 600 50 2	1800 35 600 50 4

H: 35 - T:4mm Wire Mesh Cable Tray Load Graph

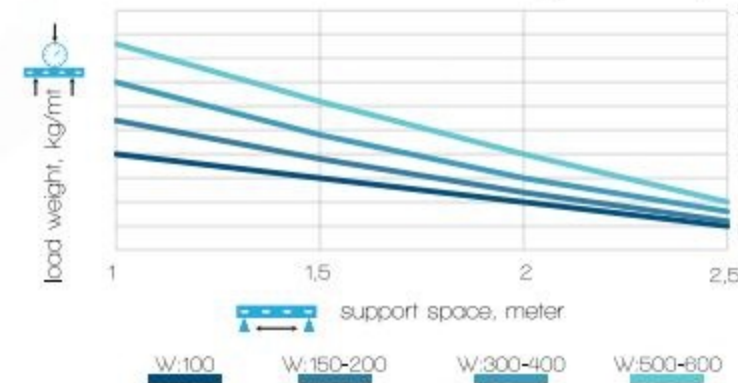

Standard length of trays 3000 mm, on request: 2000mm- 2500mm-2900mm



- Material & Finish Options:
- HDG : hot dip galvanised EN ISO 1461
  - SS : stainless steel AISI 304
  - EP : epoxy painted - RAL